

HDMI to VGA or Component with Stereo Audio Converter

Our HVY1 converts HDMI to a VGA or component output plus stereo audio. It enables an HDMI source to connect to a PC monitor, projector, or TV and has high bandwidth capability that supports a wide range of PC monitors and HDTV resolutions up to 1080p or 1920x1200. This converter has an auto resolution detections feature that will convert the HDMI source signal to the same corresponding resolution and decode the embedded audio from the HDMI source to a L/R analog stereo output. Connect a Blu-ray player or other source to display movies, pictures and other media on your PC monitor, projector, TV with a VGA/component input. A perfect solution for connecting an older VGA or component display to newer HDMI/DVI sources while maintaining high quality picture and sound.

- Convert HDMI to VGA or component with a stereo audio output
- Switch selectable VGA or component video output
- On-screen display (OSD) and auto memory function
- HDMI and DVI compliant
- HDMI input resolution up to 1080p
- VGA output resolution up to 1920x1200

Supported HDMI, VGA or Component Resolutions:

HDMI Input Resolution	VGA Output Resolution	YPbPr Output Resolution
480i@50/60	640x480@60	480i@60 (16:9/4:3)
480p@50/60	800x600@60	480p@60 (16:9/4:3)
576i@50/60	1024x768@60	576i@50 (16:9/4:3)
576p@50/60	1280x720@60	576p@50 (16:9/4:3)
720p@50/60	1280x768@60	720p@60 (16:9/4:3)
1080i@50/60	1280x1024@60	1080i@50/60
1080p@50/60	1680x1050@60	1080p@50/60
	1920x1080@60	
	1920x1200@60	

Push Buttons:

VGA/YPbPr Select output
Resolution Select resolution


LED Indication:

Power On/Off
HDMI HDMI signal detected
VGA VGA output selected
YPbPr YPbPr output selected


Caution:

1. This converter supports HDMI or DVI input at different resolutions, but requests your Monitor/Projector/TV to also support the resolution of the VGA output. To connect a DVI-D source you will need a "DVI to HDMI cable or adaptor".
2. This device is **NOT HDCP COMPLIANT**.

Installation View:

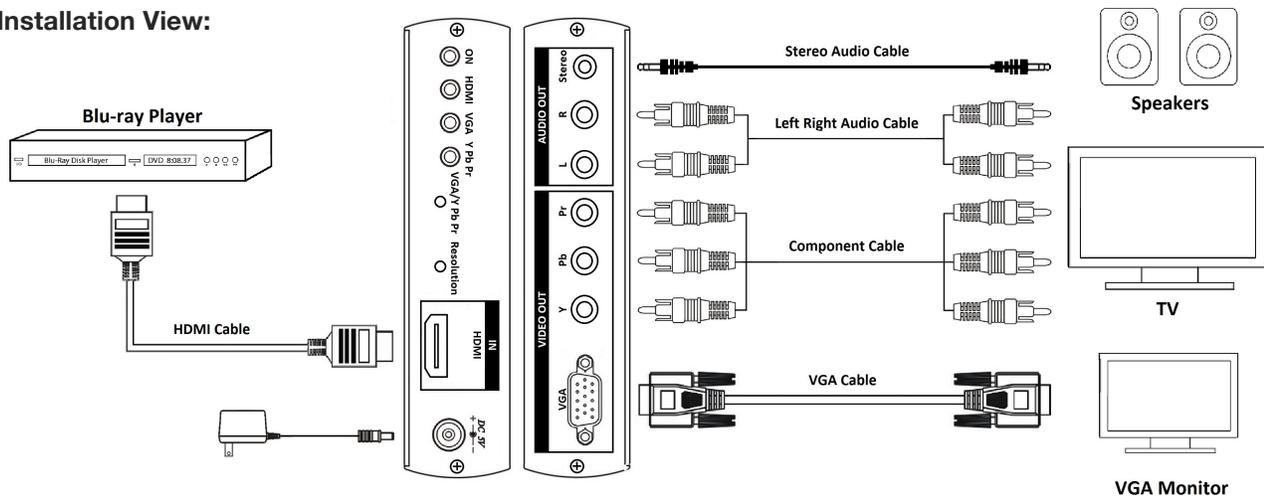

Panel View:

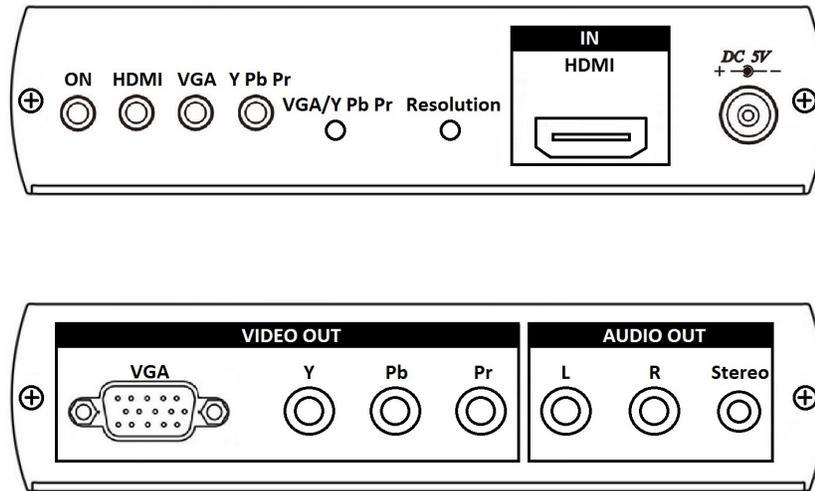

Package Contents:

- HDMI to VGA or Component with Stereo Audio Converter (Main Unit)
- 5VDC 2Amp Power Supply
- Mounting Screws
- User Instructions

Specifications:

Model:	HVY1
HDMI Input Connector	HDMI Type A x 1 (480i/p, 576i/p, 720p, 1080i/p)
VGA Output Connector	DB15 x 1 (High Density, 75Ω 0.7Vp-p) (640 x 480, 800x600, 1024x768, 1280x720, 1280x768, 1280x1024, 1680x1050, 1920x1080, 1920x1200)@60Hz
YPbPr Output Connector	RCA x 3 (Y 75Ω 0.7Vp-p, Pb Pr 75Ω 0.3Vp-p) (480i/p, 576i/p, 720p, 1080i/p)
Audio Output Connector	3.5mm Jack x 1 (10KΩ, 1Vp-p), RCA x 2 (10KΩ, 1Vp-p)
Function Button	Button x 2
Power Consumption	750mA (Max)
Power Supply	5VDC 2Amp Regulated
Temperature	Operation: 32 to 131°F, Storage: -4 to 185°F, Humidity: up to 95%
Dimensions - inches	5.51"(w) x 3.74"(h) x 1.26"(d)
Weight - lbs	.66



Do You Need Technical Support?

ZuumMedia is proud to offer free technical support to ensure your product is operating correctly.

If you are experiencing difficulties setting up this product, please call us for assistance 1-888-861-7351 or visit www.zuummedia.com for more information.

Here for You 24/7